




## DATASHEET: Tumaker BIGFoot PRO DUAL Direct Drive HR - PELLET

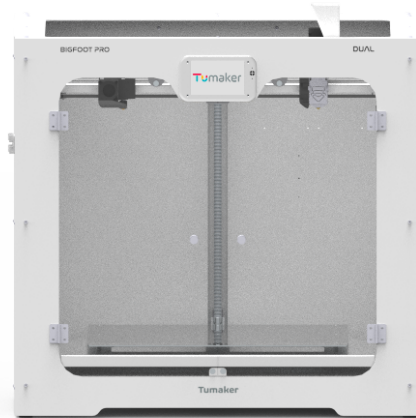

	BigFoot Pro 500	BigFoot Pro 350	BigFoot Pro 200
	Printing volume: 490x470x500 mm Dual: 475x450x500 mm Copy: 250x470x500 mm Printer size: 860x720x810 mm Package size: 1006x940x1035 mm Printer weight: 82 kg Package weight: 140 kg	490x470x350 475x450x350 250x470x350 860x720x660 1006x940x885 75kg 120kg	490x470x200 475x450x200 250x470x200 860x720x510 1006x940x735 68kg 100kg
	Filament: ABS, ASA, NYLON, PET-G, PLA, PP, XT-CF20, TPU, PLA-3D870 Pellets: Recommended size circular with 3-5mm diameter Printing speed: Depends on parameters		Maximum extruder temperature: 300°C Two temperature control points for Pellet
	Energy smart Management Power Rating: 950W Noise Level: 44 dB (closed door, 40dB)		Connected to the Internet Conectivity: Wifi, Micro SD Optional: Ethernet
	Layer resolution: 10µm Maximum layer height: Filament: Pellet: 0,8 nozzle 2.0 nozzle 5.0 nozzle 0,6 nozzle 0,8 nozzle 4.0 nozzle 0,4 nozzle 0,6 nozzle 0,25 nozzle 0,4 nozzle		Display: 5" color touch screen Control Devices: PC, tablet, Smartphone Control Mode: Web
	Heated Bed: 100°C		Simplify3D Professional Software
	Build Plate Leveling: Automatic		1 Year Limited Warranty